



TLR

REVERSIBLE FLAIL

(medium heavy type)



www.lipa-srl.it
info@lipa-srl.it

65010 Spoltore (PE) - Italy
Via Castellani (ang. Via Mare Adriatico)
Tel. +39 085 4971431 Fax +39 085 4973170

TLR

REVERSIBLE FLAIL

(medium heavy type)



The TLR flail is an ideal piece of equipment for work in orchards, in forestry and pastures. It has a front and rear attachment with lateral displacement. This reversibility means being able to maximise its potential that allows a choice of processing according to requirements.

STANDARD EQUIPMENT


- three-point hitch
- rear rubber protection
- front protection with galvanised strips
- stabiliser foot
- gearbox with through shaft with internal double freewheel
- cardan shaft
- cardan protection boot
- rotor with toothed hammers
- belt transmission
- rear height-adjustable roller with scraper
- internal counterframe
- series of internal counter-elements
- double lateral hydraulic displacement
- special powder or liquid painting (primer and enamel)

Mod.								
	(B/H/Z)	Kg	(Hp-kw) *	(g/min.)		D. Rotor		
TLR-100	1160/950/1100	1040	520	25/35-18/26	540/1000	7	140/160	3
TLR-110	1260/950/1100	1140	520	30/35-22/26	540/1000	8	140/160	3
TLR-120	1360/950/1100	1240	560	30/35-22/26	540/1000	8	140/160	3
TLR-130	1460/950/1100	1340	580	30/35-22/26	540/1000	9	140/160	3
TLR-140	1560/950/1100	1440	600	30/35-22/26	540/1000	10	140/160	3
TLR-150	1660/950/1100	1540	620	30/35-22/26	540/1000	10	140/160	3
TLR-160	1760/950/1100	1640	640	30/35-22/26	540/1000	11	140/160	4
TLR-180	1960/950/1100	1840	680	45/50-33/37	540/1000	12	140/160	4
TLR-200	2120/950/1100	2000	700	45/50-33/37	540/1000	13	140/160	4
TLR-220	2360/950/1100	2240	730	50/60-37/44	540/1000	15	140/160	4

* the horsepower shown are indicative and express the power required by the flail for its operation.

ACCESSORIES ON REQUEST

1. Pair of side skids
2. Ramponi
Size 100 to 120
Size 130 to 160
Size 180 to 220
3. Front rubber protection on the strips
4. Galvanised and rubber chains to replace the strips
Size 100 to 120
Size 130 to 160
Size 180 to 220
5. Oversized hammer supports
Size 100 to 120
Size 130 to 160
Size 180 to 220

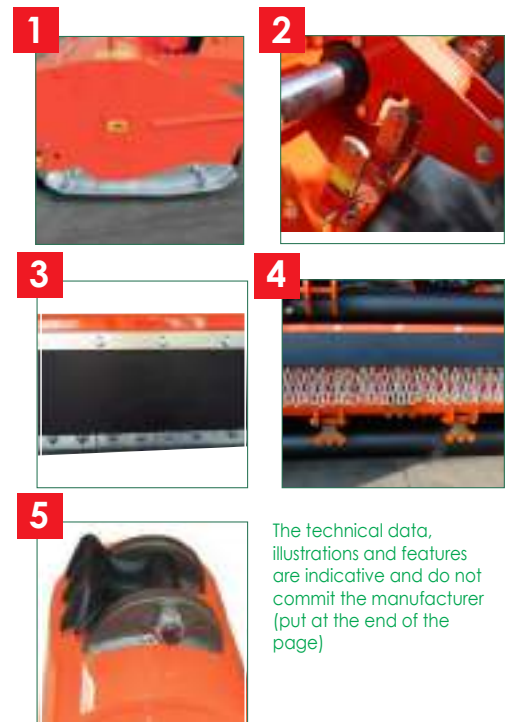

The technical data, illustrations and features are indicative and do not commit the manufacturer (put at the end of the page)

